


How to?



Gallagher PowerFence™ is used for a wide range of game fence applications including the Big Five i.e. Elephants, Rhino, Lions, Leopards and African Buffalo.

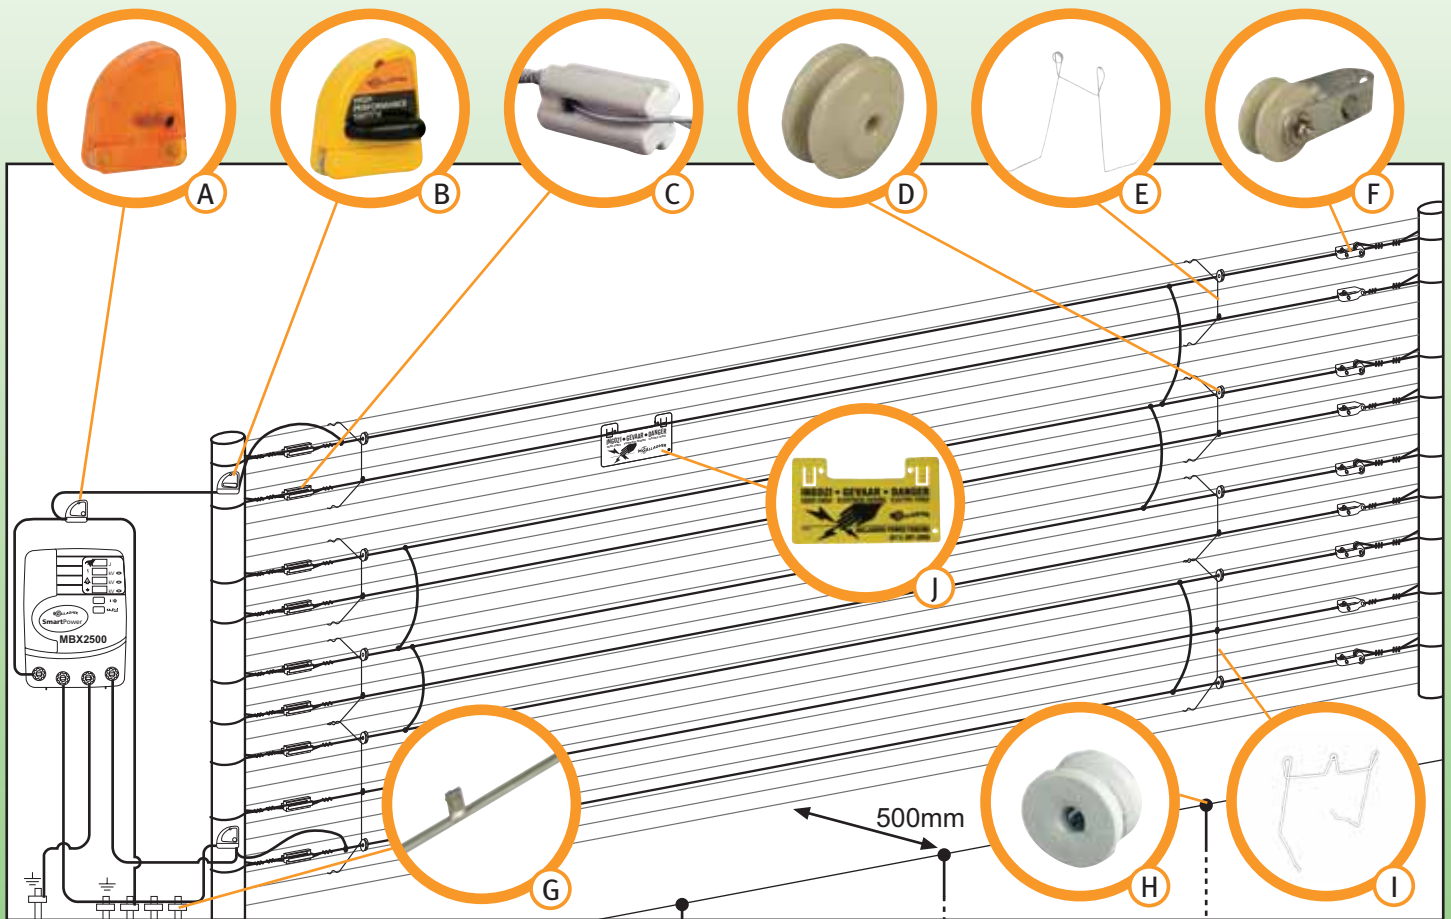

Why use Electric Fencing for Game Control?

Specific Design

- Purpose built for wildlife containment
- Strong and durable for low maintenance
- Increasing power as fence load increases

Few Physical Constraints


- Any location, most terrains
- Works effectively across long distances
- Radio telemetry – alarms sent to remote monitoring stations
- Not reliant on electricity source – solar power option

Protection

- Protects wildlife from poachers & predators
- Protecting people by containing wildlife
- Protection of crops from migrating animals

Strong Deterrant

- Electrical pulse deters wildlife from touching fence
- Fences are alarmed
- Game animals respect the fence

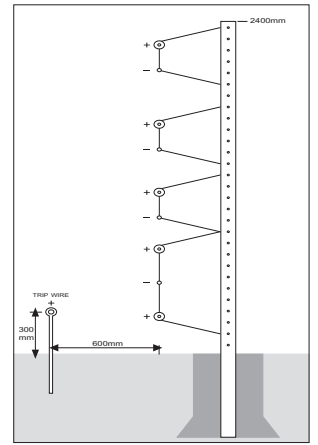

Description	Length of Fence X	Strain Posts Y	Total Units Required	Pack Size	Packs needed
A Lightning Diverter	Minimum of 2 recommended		A	1	
B Cut Out Switch	Minimum of 1 recommended		B	1	
C Strain Insulators (Porcelain)	10 per second strain post		1 x (Y/2) C	10	
D Bobbins - Porcelain (G67413)	5 per 10m		6 x (X/10) D	10	
E Double Offset Bracket	3 per 10m		3 x (X/10) E	1	
F Tensioner - Combi	6 per second strain post		6 x (Y/2) F	5	
G Earth Rods	Minimum of 5 recommended		G	1	
H Insulators - Porcelain (G67403)	1 per 3m		1 x (X/3) H	10	
I Triple Offset Bracket	1 per 10m		1 x (X/10) I	1	
J Warning Sign	1 per 200m		1 x (X/200) J	10	
K Energizer			K		
L Tensioner - Donald	4 per second strain post		4 x (Y/2) L	10	
M Intermediate Post Y Standard 3m high posts	1 per 10m		1 x (X/10) M	1	
N Double Insulated Undergate Cable			Length of cable (metres) N	100m roll	
O Strain Posts Tubular 3m high posts	1 per 200m		1 x (X/200) O	1	
P Wire - 2.24 high strain fully galvanised (Also used for bridging wire)	10 strands		10 x (X) P	1650m roll	
Q Trip Wire Posts (Y Standard with Insulator)	1 per 3m		1 x (X/3) Q	1	
R Line Clamp	1 per connection/bridging		R	100	

* A 10 wire (including trip wire) fencing option is shown (suitable for Big Five Game Fence). The number of wires and wire spacing will depend on the type of game on your property.